




# LEICA M11 MONOCHROM

Technical Data.



<b>Designation</b>	<b>Leica M11 Monochrom</b>
Camera type	Digital system camera with rangefinder
Type No.	2416
Order No.	20208 (EU/US/CN), 20209 (JP), 20210 (ROW)
Buffer memory	3 GB DNG™: 15 shots JPG: > 100 shots
Storage medium	UHS-II (recommended), UHS-I, SD/SDHC/SDXC memory card (SDXC cards up to 2TB) Internal memory: 256 GB
Material	Full-metal housing made of magnesium and aluminum, leatherette cover
Lens mount	Leica M bayonet with additional sensor for 6-bit encoding
Operating conditions	0°C to +40°C
Interfaces	ISO accessory shoe with additional control contacts for Leica flash units and Leica Visoflex2 viewfinder (optional accessory) USB 3.1 Gen1 Type-C
Tripod thread	A 1/4 DIN 4503 (1/4") with stainless steel in the base

## Dimensions

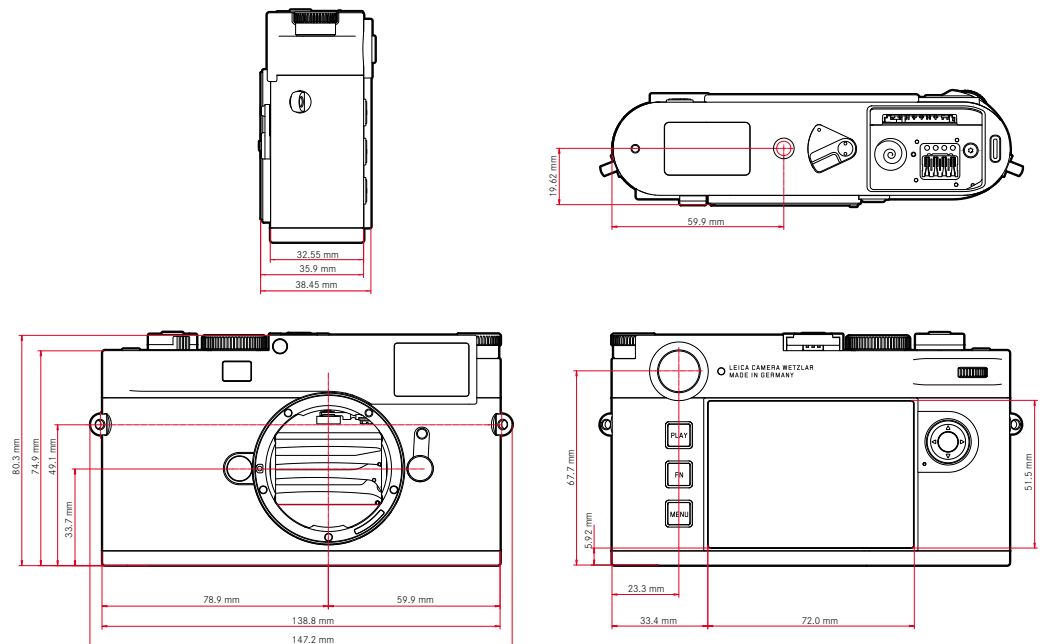

<b>Weight</b>	Black: approx. 542g/461 g (with/without battery)
---------------	--



# LEICA M11 MONOCHROM

## Sensor

Sensor size Monochrome BSI CMOS sensor, pixel pitch: 3.76 µm, 35 mm: 9528 x 6328 pixels (60.3 MP)

Processor Leica Maestro series (Maestro III)

Filter UV/IR filter, no low-pass filter

File formats DNG™ (raw data, loss-free compression), DNG + JPG, JPG (DCF, Exif 2.30)

Image resolution	DNG™	L-DNG	60.4 MP	9536 x 6336 pixels
		M-DNG	36.6 MP	7424 x 4936 pixels
	S-DNG	18.5 MP	5280 x 3506 pixels	
JPG	L-JPG	60.1 MP	9504 x 6320 pixels	
	M-JPG	36.2 MP	7392 x 4896 pixels	
	S-JPG	18.2 MP	5248 x 3472 pixels	

The entire sensor surface will always be used irrespective of format and resolution.  
Digital Zoom 1.3x and 1.8x available (always based on L-DNG or L-JPG)

File size	DNG™	L-DNG	approx. 70–120 MB
		M-DNG	approx. 40–70 MB
	S-DNG	approx. 20–40 MB	
JPG	L-JPG	approx. 15–30 MB	
	M-JPG	approx. 9–18 MB	
	S-JPG	approx. 5–9 MB	

JPG: depending on resolution and image content

Color depth DNG™: 14 bit, JPG: 8 bit

Color space sRGB

## Viewfinder/LCD panel

Viewfinder Large, bright-line rangefinder with automatic parallax compensation, suitable for -0.5 dpt, optional corrective lenses available: -3 to +3 dpt

Display Four-digit digital display with items show on the top and bottom, Image field limiter: two lit frames: 35 mm + 135 mm, 28 mm + 90 mm, 50 mm + 75 mm (automatic switchover when lens is attached)

Parallax compensation The horizontal and vertical difference between viewfinder and lens is compensated automatically in line with the relevant focus setting. Congruence of viewfinder and actual image. The size of the bright-line frame matches the distance:  
- at 2 m: the exact sensor size of approx. 23.9 x 35.8 mm  
- at infinity: (depending on focal length) approx. 7.3% (28 mm) to 18% (135 mm)  
- less than 2 m: less than sensor size

Viewfinder magnification 0.73x (all lenses)

Large-base rangefinder Split or superimposed image rangefinder shown as a bright field at the center of the viewfinder image

LCD panel 2.95" (Active Matrix TFT), sapphire glass, 2 332 800 dots, format 3:2, Touch control available

## Shutter

Shutter type Electronically controlled focal plane shutter and electronic shutter function

Shutter speeds Mech. shutter: 60 min to 1/4000 s  
Electro. shutter function: 60 s to 1/16000 s  
Flash Synch: up to 1/180 s  
Optional noise reduction via additional "black picture" (can be disabled)

Shutter button Two-stage  
(Step 1: activation of the camera electronics including exposure metering and exposure lock, Step 2: release)

Self-timer Delay time: 2 s or 12 s

Drive Mode **Single**  
**Continuous - Low Speed** (3 fps)  
**Continuous - High Speed** (4.5 fps)  
**Interval shooting**  
**Exposure Bracketing**



# LEICA M11 MONOCHROM

## Focusing

Focus range	Rangefinder: 70 cm to ∞ Live View: depending on the attached lens
Focus mode	Manual (focus assist functions Magnification and Focus Peaking available)

## Exposure

Exposure metering	TTL (exposure metering through the lens), with working aperture
Metering principle	Exposure metering is done by the image sensor for all exposure metering methods (in Live View mode and in rangefinder mode)
Exposure metering methods	Spot, Center-Weighted, Highlight-Weighted, Multi-Field
Exposure modes	Aperture priority mode (A): automatic shutter speed control with manual aperture preselection Manual (M): manual setting for shutter speed and aperture
Exposure compensation	±3 EV in 1/3 EV increments
Automatic bracketing	3 or 5 frames, graduations between shoots up to 3 EV, in 1/3 EV increments, additional optional exposure compensation: up to ±3 EV
ISO sensitivity range	Auto ISO: ISO 125 (native) to ISO 200 000, also available in flash mode Manual: ISO 125 to ISO 200 000

## Flash

Flash unit connector	Via the accessory shoe
Metering principle	Flash exposure metering is done by the image sensor for all exposure metering methods (in Live View mode and in rangefinder mode)
Flash sync time	↔ : 1/180 s, slower shutter speeds available, automatic switchover to TTL linear flash mode with HSS-compatible Leica system flash units if sync time is undercut
Flash exposure metering	Using center-weighted TTL pre-flash metering with Leica flash units (SF 26, SF 40, SF 58, SF 60, SF 64) or with system-compatible flash units, remote controlled flash SFC1
Flash exposure compensation	SF 40: ±2 EV in 1/2 EV increments SF 60: ±2 EV in 1/3 EV increments Other: ±3 EV in 1/3 EV increments
Displays in flash mode (in the viewfinder only)	Flash icon: connection of an external flash unit

## Equipment

WLAN  
The Leica FOTOS app is required to use the WLAN function. The Leica app is available from the Apple App Store™ or the Google Play Store™. 2.4 GHz/5 GHz\* dual band IEEE802.11 a/b/g/n/ac Wave2 WLAN (standard WLAN protocol), encryption method: WLAN-compatible WPA™/WPA2™, access method: infrastructure mode

	Regional variant		
	EU/US/CN	JP	ROW
Wi-Fi 5 GHz	11a/n/ac: Channel 149-165 (5745-5825 MHz)	11a/n/ac: Channel 36-48 (5180-5240 MHz)	-
Wi-Fi 2.4 GHz	11b/g/n: Channel 1-11 (2412-2462 MHz)		

Bluetooth	Bluetooth v4.2 BR/EDR/LE, BR/DR-channel 1-79, LE-channel 0-39 (2402-2480 MHz)
GPS	Geotagging via Leica FOTOS app using Bluetooth
Menu languages	English, German, French, Italian, Spanish, Russian, Portuguese, Japanese, Traditional Chinese, Simplified Chinese, Korean

\* Unavailable for regional variant "ROW".



# LEICA M11 MONOCHROM

---

## Power supply

Rechargeable battery (Leica BP-SCL7)	Li-Ion (Lithium-Polymer) rechargeable battery, rated voltage: 7.4V / capacity: 1800 mAh, Charging voltage/current: DC 1000mAh, 7.4V, operating conditions: +10°C to +35°C (charging) / +0°C to +40°C (discharged), manufacturer: Fuji Electronics (Shenzhen) Co., Ltd. made in China  Approx. 700 shots (in accordance with CIPA Standard in rangefinder mode), up to approx. 1700 shots (Leica adapted shooting cycle)
Charger (Leica BC-SCL7)	Input: USB-C DC 5V, 2A, output: DC 8.4V, 1A, operating conditions: +10°C to +35°C, manufacturer: Dee Van Enterprises Co., Ltd., made in China
Switching adapter (Leica ACA-SCL7)	Input: AC 110V - 240V ~ 50/60Hz, 0.3A, output: DC 5V, 2A, operating conditions: +10°C to +35°C, manufacturer: Dee Van Enterprises Co., Ltd., made in China
USB power supply	When in standby mode or Off: USB charging function When On: USB power supply and intermittent charging

---